

Modular labels

15 mm, self adhesive, pre-cut

The MG-17.5 series comprises labels designed for use with modular components.


Consult us for availability of other colours. Note: UV resistance may vary between colours.

MG-17.5-VY

Material: PVC film; the colours white PVC99008WH and yellow PVC990080YE are UL approved.

Operating temperature range: -30°C (-22°F) to +70°C (+158°F)

Application temperature range: +10°C (+50°F) to +40°C (+104°F)

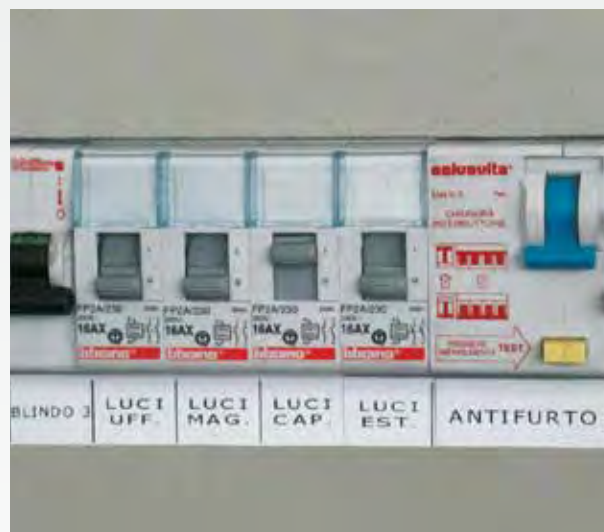

Family	N° of modules	Size mm	Type		Labels per sheet	Quantity	SW code
			white PVC99008WH	yellow PVC990080YE			
MG-17.5-VY	6	15 x 107,5	990746N	990747N	7	350	570

MG-17.5-PY

Metallic grey labels are used indoor.

Material: Polyester film; the colours white PET99005WH and metallic grey PET99005GY are UL approved.

Operating temperature range: -40°C (-40°F) to +130°C (+266°F)

Application temperature range: +10°C (+50°F) to +40°C (+104°F)



Family	N° of modules	Size mm	Type		Labels per sheet	Quantity	SW code
			white PET99005WH	metallic grey PET99005GY			
MG-17.5-PY	6	15 x 107,5	990777N	990779N	7	350	570

Directly on the panel or with modular backing strips in PVC.



template with PET support.....page 10
ribbons.....page 11
modular backing strips.....page 42