



KG 4330

SoliTherm® ComPact

The economical all-round solution







External or recessed mounting

- ✓ Cooling capacities: 10,890 and 13,650 BTU
- ✓ Nano-coated hydrophobic condenser
- ✓ Virtually maintenance free
- ✓ Adjustable electronic controller with display
- ✓ Optional condensate evaporator
- ✓ Standard recess depth of 3.5 inch
- ✓ For accessories please refer to page 42
- ✓ Assembly parts, mounting template and condensation kit included




KG 4330, KG 4340					
Type	KG 4330-230V	KG 4330-120V	KG 4330-400V	KG 4340-230V	KG 4340-400V
Order number external	43300001	43301001	43302001	43400001	43402001
Order number recessed	43300081	43301081	43302081	43400081	43402081
Order number stainless steel 304 (V2A)	43XXXX2 / 43XXXX26				
Cooling capacity 95F / 95F	10,240 BTU		13,650 BTU		
Cooling capacity 95F / 122F	10,890 BTU		13,650 BTU		
Compressor type	Reciprocating compressor				
Operating temperature range	50°F - 131°F				
Setting range	68°F - 122°F				
Ambient / cabinet air flow	441 / 506 cfm			618 / 506 cfm	
Mounting	external / recessed (3.5 inch)				
Dimensions A x B x C external	48.4 x 19.7 x 13.4 inch				
Dimensions A x B x C (D) recessed	51 x 21.9 x 13.4 (9.8) inch				
Housing material / color	Mild steel, powder coated / RAL 7035				
Weight	149 lbs.	165 lbs.	160 lbs.	152 lbs.	160 lbs.
ELECTRICAL DATA					
Voltage / Frequency	230 V ~ 50/60 Hz	120 V ~ 60 Hz	400/460 V ~ 50/60 Hz 3~	230 V ~ 50/60 Hz	400/460 V ~ 50/60 Hz 3~
Current 95F / 95F	5.6 / 7.6 A	15.3 A	2.1 / 2.3 A	8.9 / 10.2 A	2.9 / 2.7 A
Starting current	25.1 A	49 A	7.6 / 8.1 A	29.6 A	8.2 / 8.5 A
Max. current	9.2 A	18.4 A	3.3 / 3.5 A	14.2 A	4.6 / 4.4 A
Nominal power 95F / 95F	1.33 kW @ 50 Hz 1.69 kW @ 60 Hz	1.37 kW	1.34 kW @ 400 V 1.70 kW @ 460 V	1.88 kW @ 50 Hz 2.31 kW @ 60 Hz	1.91 kW @ 400 V 2.33 kW @ 460 V
Max. power	1.61 kW @ 50 Hz 2.06 kW @ 60 Hz	1.65 kW	1.66 kW @ 400 V 2.10 kW @ 460 V	2.40 kW @ 50 Hz 3.27 kW @ 60 Hz	2.43 kW @ 400 V 3.30 kW @ 460 V
Fuse rating	16 A (T)	20 A (T)	3 x 6 A (T)	20 A (T)	3 x 6 A (T)
Connection	Connection terminal block				
NEMA rating	Type 12				
Certification	CE, RoHs, cURus				

Performance graphs

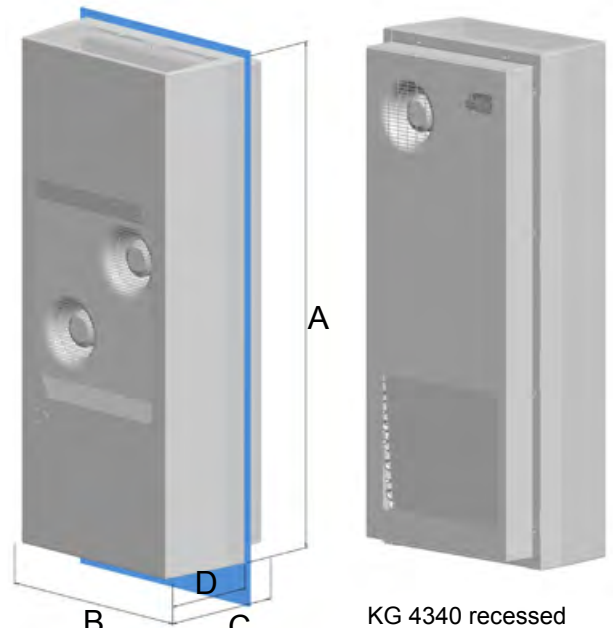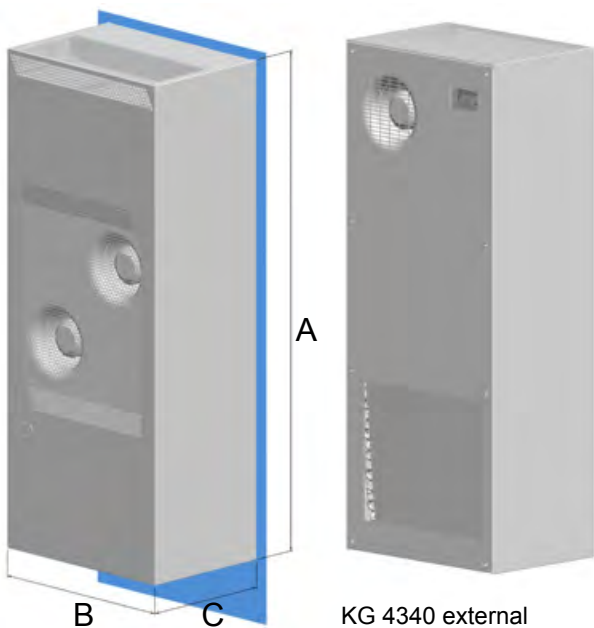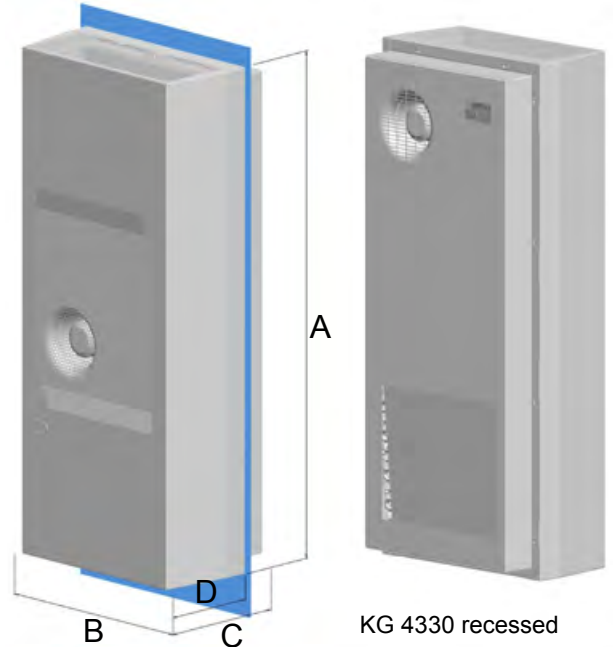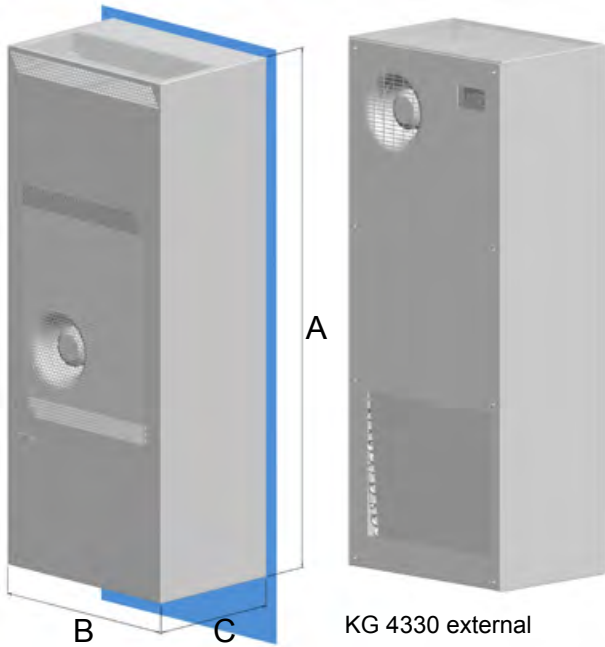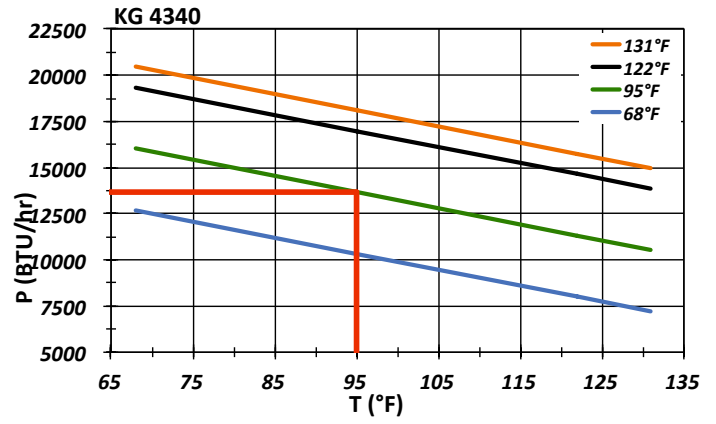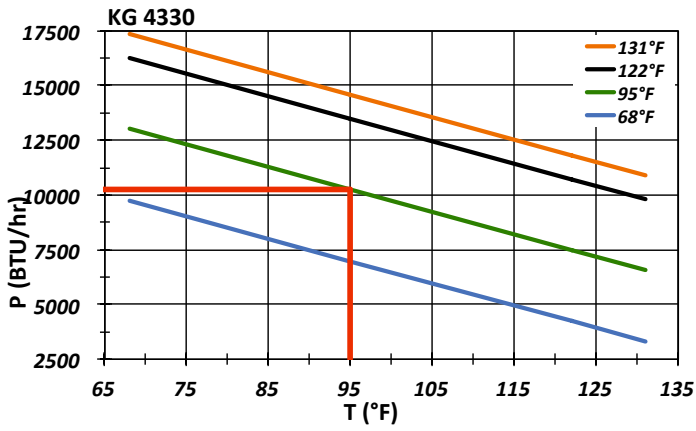


For mounting templates please refer to page 33

Mounting templates ComPact Line

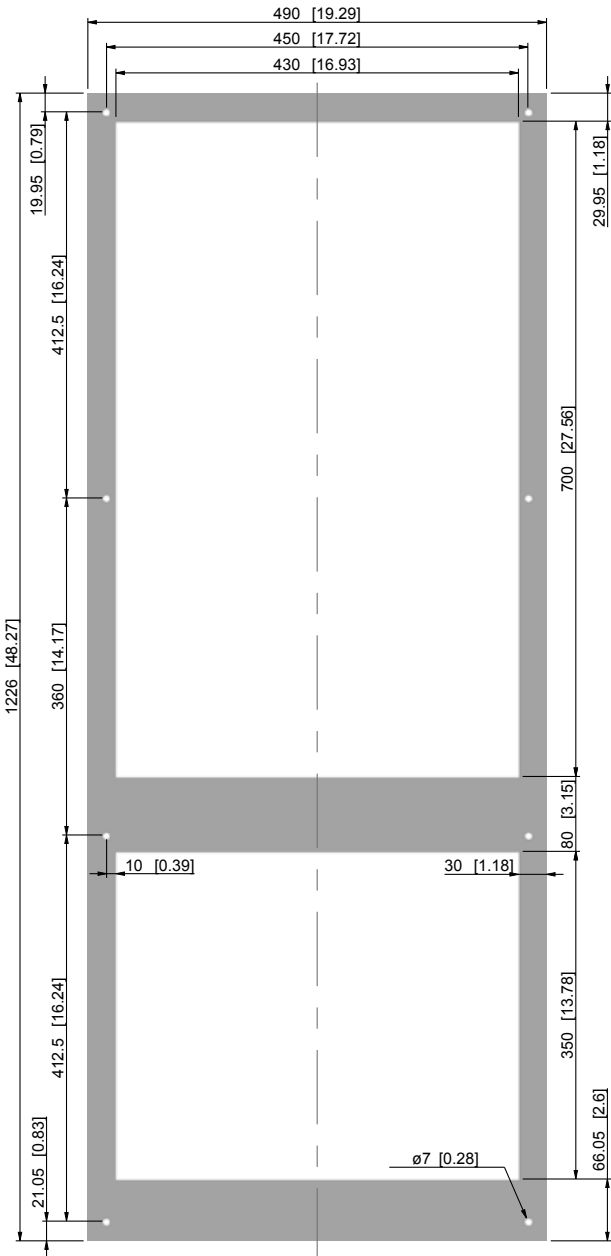

KG 4325 / 30 / 40 external

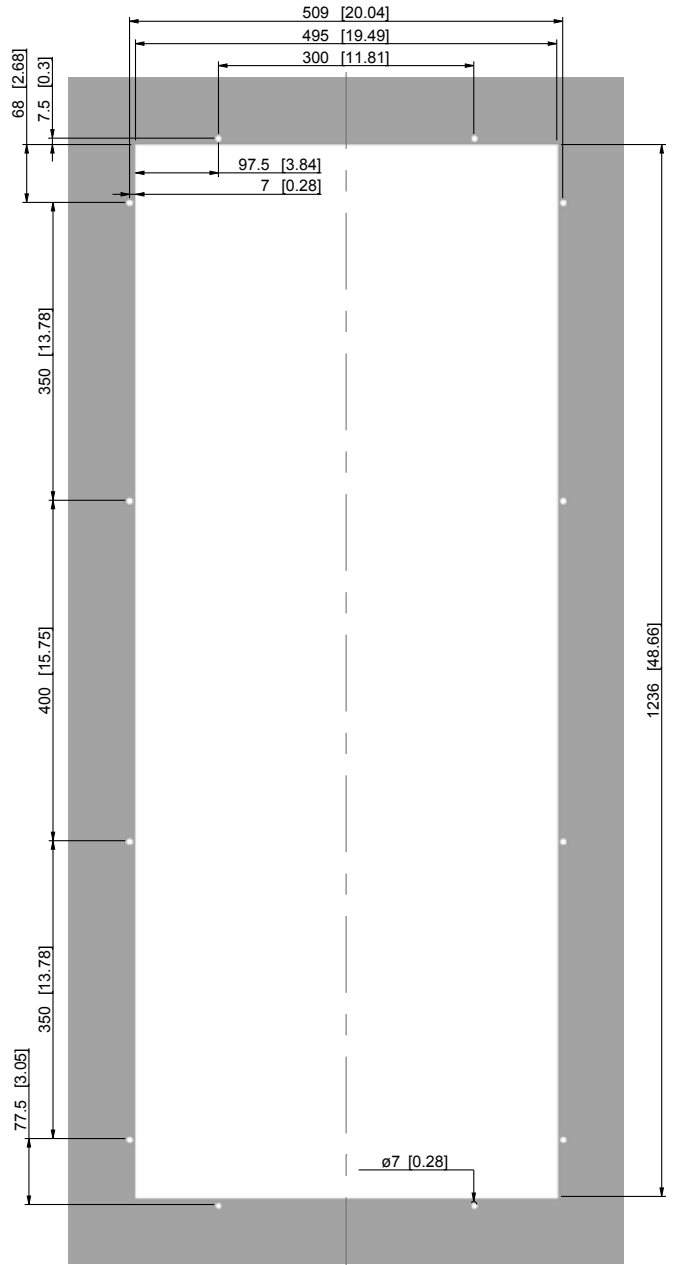

KG 4325 / 30 / 40 recessed